SAST/CLPC/ACU-EXTERNAL WORKS/196 /2026-27 04/11/2026

TENDER NOTIFICATION

The Head, CLPC, Sri Adichunchanagiri Shikshana Trust invites closed tenders from eligible tenderers or bonafide licensed manufacturer (OEM) or their authorized local supplier/ dealer/ distributor in the state of Karnataka for the **External Works for PHE and Electrical Piping works at ACU, BG Nagara** as per section I & II.

01	Name of the work	Supply and Installation of External Works for PHE and Piping works at ACU, BG Nagara.
02	Last Date for Tender Submission	On or before 11.11.2026.

Section-1

Instructions to Tenderers

1) The Tenderer shall submit the bids (Technical & Financial bids) through the mail id: **clechead@bgscet.ac.in** on or before the last date of tender submission (for any or all list of items) on professional business letterheads only. The details to be printed on the letter head is as follows
   i) Tender for Supply and Installation of **External Works for PHE and Electrical Piping works at ACU, BG Nagara**
   ii) Tender Reference number Project Works.
   iii) Address to "" The HEAD, CLPC, Sri Adichunchanagiri Shikshana Trust, BGSCET Campus, Mahalakshmipuram, Bengaluru – 560086"
   iv) The tenderer shall submit the original documents to this office on the last day of submission for verification who prefers to submit the tender through Post can dispatch the same through Registered post / Speed post or Couriers as to reach the above address on or before the due date and time specified in the Tender Notice. Tenders received after the due date and time, for what so ever reasons will not be considered and the authority, Head of CLPC will not be liable or responsible for the same.
2) **Tender Currency:** Prices shall be quoted in Indian Rupees only.
3) **AMC/CMC (IF ANY)** is subject to the Sri Adichunchanagiri shikshana trust's norms.
4) **Warranty:** 3 Years
5) **Amendment of tender documents:** At any time prior to the deadline of submission of tenders the trust may, for no reason, whether as its own initiative or otherwise modify the tender documents by amendment. Sri Adichunchanagiri Shikshana Trust reserves all the rights to accept, reject, incorporate changes and re-tender without giving any reasons.
6) **Documents Comprising the Tender:** Shall attach Brochure, Certification of the product, Bank/account details, PAN, GSTIN, Good Standing Certificate and 02 years of ITR declaration inside the envelope and the company contact details with email id on the in the below mention format in annexure -
7) **Tender Prices:** Prices indicated on the price schedule shall be entered separately I.e. the price of the goods, quoted (ex-works, ex-factory, ex-showroom, ex-warehouse, or off-the-shelf, as applicable), including all duties and sales and the other taxes already paid or payable. Any Indian duties, sales and other taxes which will be payable on the goods if the contract is awarded. Conditional tenders will not be considered. The bidder has to give the quotation in the below enclosed format in annexure – 2.
8) **Validity of the Bid:** 90 days from the last date of submission of bid.

9) **Corrupt or Fraudulent practices:** Sri Adichunchanagiri Shikshana Trust requires that the tenderers, observe the highest standard of ethics during the procurement and execution of such contracts. In purchase of this policy:
   a) Will reject a proposal for award if it determines the tenderer recommended for award has engaged in corrupt or fraudulent practices in competing for the contract in question;
   b) Will declare a firm ineligible, either indefinitely or for the stated period of time, to be awarded a university contract if it any time determines that the firm has engaged in corrupt or fraudulent practices in competing for, or in executing, a trust contract.
10) **Process to be confidential:** Information relating to the examination, clarification, evaluation, and comparison of tenders and recommendations for the award of contract will not be disclosed to tenderers or any other persons not officially concerned with such process until the award to the successful tenderer has been announced. Any effort by a tenderer to influence the employer's processing of tenders or award decisions may result in rejection of his tender.
11) **Clarification of Tenders:** To assist in the examination, evaluation, and comparison of tenders the employer may, at his discretion, ask and tenderer for clarification of his tender, including breakdowns of unit rates. The request for clarification and the response shall be writing or by cable, but no change in the price or substance of the tender shall be sought, offered, or permitted except as required to confirm the correction of arithmetic errors discovered by the employers in the evaluation of the tenders.
12) **Delivery:** The successful BIDDER should commence the service as per the tender document/work or purchase order. For any queries or assistance, please write to clechead@bgscet.ac.in or telephone to +91-9448270489.
13) **Penalty Clause:** Non-execution of supply order – for the reasons of failure to supply partially or completely within the stipulated time or any event of breach of contract. In case at any following stages
   a) For the delayed supply (3 days of grace period) – 5% deduction
   b) Quantity issues – 5 % deduction
   c) Quality issues – 10% deduction.

	Make : Prince / Supreme						
a)	110 mm dia (6kg / sq.cm)						
		Mtr.	10				
b)	160 mm dia (6kg / sq.cm)						
		Mtr.	25				
c)	200 mm dia (6kg / sq.cm)						
		Mtr.	200				
d)	250 mm dia (6kg / sq.cm)						
		Mtr.	50				
e)	315 mm dia (6kg / sq.cm)						
		Mtr.	50				
f)	350 mm dia (6kg / sq.cm)						
		Mtr.	25				
03	Construction of brick masonry inspection chambers of internal clear dimension as mentioned below by using first class table moulded modular bricks 230 mm thick wall in cement mortor joints in 1:6, over CC 1:4:8 bed 100 mm thick including providing precast RCC top slab in 1:2:4 Mix (1 cement: 2 oarse sand: 4 graded stone aggregate), with angle iron frame, inside plastering 15mm thick with CM 1:4 (1 cement:4 fine sand) finished very smooth with floating coat of neat cement & making benching and channelling in cement concrete 1:2:4 (1 cement: 2 coarse sand: 4 graded stone aggregate) neatly finished complete as per standard design and as per drawing and specifications.							
	(The rate shall include necessary earth work excavation in all types of soil excluding soft and hard rock, back filling including consolidation disposing the excess earth to all leads curing, finishing etc.,)						

Section-2

PROPOSED ACU CAMPUS AT BELUR.

SUBJECT: BILL OF QUANTITIES FOR WATER SUPPLY, DRAINAGE & ELECTRCIAL WORKS.

**** S U M M A R Y ****

SL. NO.	DESCRIPTION	AMOUNT IN (Rs)
	PART A PHE Works	
1	WATER SUPPLY AND DRAINAGE WORKS.	
	(External sewer line network)	
	PART B For Electrical Works	
1	MISCELLANEOUS WORKS	
2	CIVIL WORKS	
	TOTAL.	

WATER SUPPLY, DRAINAGE WORKS

PART A PHE Works

Sl. No.	DESCRIPTION	UNIT	QTY	RATE		AMOUNT	
				SUPPLY	INSTALLATION	SUPPLY	INSTALLATION
02	Providing ,fixing, testing and commissioning of PVC sewer line of approved make confirming to IS 4985 of Agricultural series - 6 kgs / sq.cm pressure rated, for underground drainage laid under the soil from chamber to chamber outside the building, to the required slopes, jointing with solvent cement followed						
	by application leak proof adhesives of FRP paste, etc. complete.						
	Notes: Rate is excluding for earthwork and backfilling. It shall be measured separate and paid for.						

a)	Inside size of 450 x 450mm & depth not exceeding 600mm including providing 450 x 450mm RCC cover / Agam FRP covers (20 T capacity) with MS L- angle frame.	Nos.	RO				
b)	Inside size of 600 x 600mm & depth not exceeding 900mm including providing 600 x 600mm RCC cover / Agam FRP covers (20 T capacity).	Nos.	01				
c)	Inside size of 900 x 900mm & depth not exceeding 1500mm including providing 600 x 600mm RCC cover / Agam FRP covers (20 T capacity).	Nos.	06				
03	Clear size 1400 mm dia conical manhole at bottom with 560 mm dia at top with pre cast RCC cover with frame (as per standard make or SFRC / southern concrete company / Agam FRP covers (20 T capacity), PVC encapsulated foot rest staggered at 300 mm apart etc., complete wall thickness 230 mm, CC bed 150 mm thick, plastering internal and external in CM 1:4 with adding water proof compound as per manufacture details including consolidation disposing the excess earth to all leads curing, finishing back filling etc.,						
a)	Depth 1200 to 2000mm						
		Nos.	05				
b)	Depth 2000mm to 2500mm						
		Nos.	01				
c)	Depth 2500mm to 3000mm						
		Nos.	RO				
d)	Depth 3000mm to 3500mm						
		Nos.	02				

e)	Depth 3500mm to 4000mm						
		Nos.	RO				
04	Excavating trenches of required width and depth for external underground drainage pipes, in all kinds of soil exluding soft rock and hard rock including excavation for sockets and dressing of sides, ramming of bottoms & getting out the excavated soil & then refilling the the tranch with soil as required in layers not exceeding 20cm in depth including consolidating each deposited layer by ramming, watering etc., including disposal of excess soil to all leads or as instructed by the site Engineer.						
a)	Regural soil	Cu.m.	1250				
b)	Excavating Soft rock	Cu.m.	25				
c)	Excavating Hard rock	Cu.m.	25				
	TOTAL						

ELECTRCIAL WORKS.

PART B For Electrical Works.

Sl. No.	DESCRIPTION	UNIT	QTY	RATE		AMOUNT	
				SUPPLY	INSTALLATION	SUPPLY	INSTALLATION
A.	**MISCELLANEOUS WORKS:**						
1.0	Supply and laying of DWC pipe at 750mm depth(Bottom of the pipe) from Ground Level including pointing ends, fixing collars with including cost of all materials, labour, curing,excavation and back filling complete as required.						
1.1	300mm dia.	Rmtr	1000				

1.2	200mm dia.	Rmtr	100				
1.3	150mm dia.	Rmtr	300				
1.4	100mm dia.	Rmtr	150				
2.0	Supply and fixing of cable route markers of round type Insrcibed "LT cable", "HT Cable", "LT cable Joint" etc, as the case may be by providing an angle support and cement concrete for foundation, curing etc. Markers shall project 300 mm above ground level. These markers shall be placed at a distance not exceeding 10 m.						
1.1	Cast iron cable route markers of circular shape for L.T cables	Nos	100				
		TOTAL					
B.	**CIVIL WORKS :**						
1.0	**Earth excavation** of size **800mm depth x 600mm wide** for laying HUME/DWC Pipe including river sand cousining. The rate should include refilling, compactness of excavated soil and disposal of surplus earth/rock to the places directed by engineer in charge and Yellow Color Warning Tap with Black legend non detachable of (200mm (W) x 100 micron Thick.)	Cu. Mtr	300				

2.0	Construction of 1000**x 1000 x 750mm inspection chamber(HT)** with approved quality burnt bricks in CM 1:6 prop. with wall thickness of 15 cms on bed of 150 cms thick cement concrete of 1:3:6 and plastered all faces with CM 1:4.The cost shall include cost of 45 x 45 x 6mm GI 'L' angle frame and CI/DI cover of size **600(L) x 600(W)** complete with clear dimensions of 600(L) x 600(W) x 1000(D)mm including cost of all fixers as directed by client / consultant. The chamber should be capable of receiving HUME / DWC / PVC / RCC pipes on all four sides. Please refer external cable routing plan for complete details.	Nos	10				
3.0	Construction of **600 x 600 x 750mm inspection chamber(LT & LV)** with approved quality burnt bricks in CM 1:6 prop. with wall thickness of 15 cms on bed of 150 cms thick cement concrete of 1:3:6 and plastered all faces with CM 1:4. The cost shall include cost of 45 x 45 x 6mm GI 'L' angle frame and CI / DI cover of size **600(L) x 600(W)** complete with clear dimensions of 600(L) x 600(W) x 800(D)mm including cost of all fixers as directed by client / consultant. The chamber should be capable of receiving HUME / DWC / PVC / RCC pipes on all four sides. Please refer external cable routing plan for complete details.	Nos	50				
		TOTAL					


APPROVED MAKES FOR ELECTRICAL ITEMS		
Sl.No.	**Description**	**Make of Material**
1	DWC/HDPE Pipe	Astral /Supreme

Annexure – 1

PARTICULARS OF THE BIDDER

Sr. No	Description	Details (to be filled by the responder to the Bid)
1	Name of the company	
2	Official address	
3	Phone No. And Fax No.	
4	Corporate Headquarters Address	
5	Phone No. And Fax No.	
6	Web Site Address	
7	Details of Company's Registration (Please enclose copy of the company registration document)	
8	Name of Registration Authority	
9	Registration Number and Year of Registration	
10	ISO certifications and its validity	
11	GST registration No.	
12	Permanent Account Number (PAN)	
13	Company's Revenue for last 3 years (Year wise)	
14	Company's net worth for the last year	
15	Bank Details (Name, Account no., Branch, IFSC, MICR)	

ADICHUNCHANAGIRI
UNIVERSITY
Accredited with NAAC Grade A+

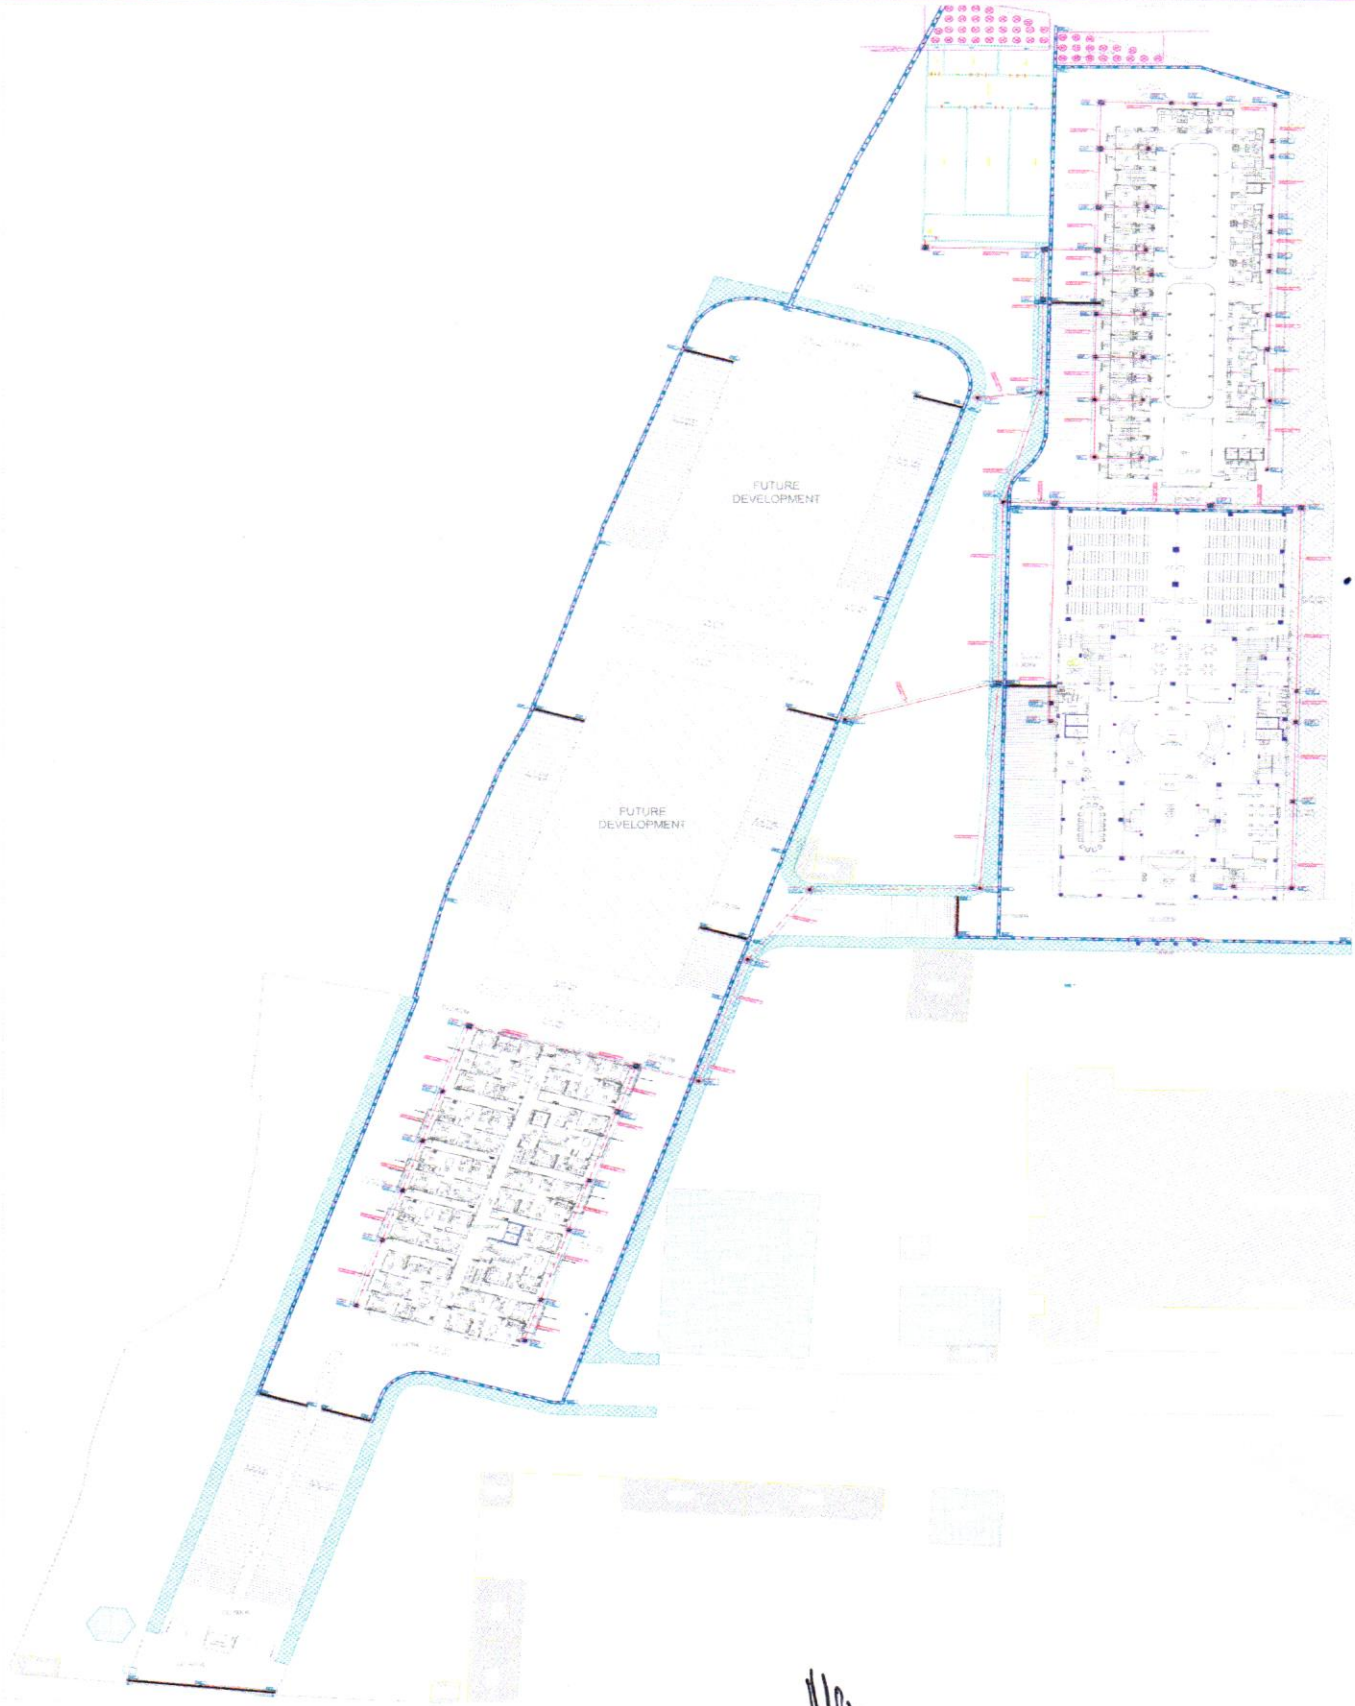

: 08234-287285 | : info@acu.edu.in, registrar@acu.edu.in | : www.acu.edu.in
BG Nagara - 571448, NH-75, Nagamangala Taluk, Mandya District, Karnataka, India.